
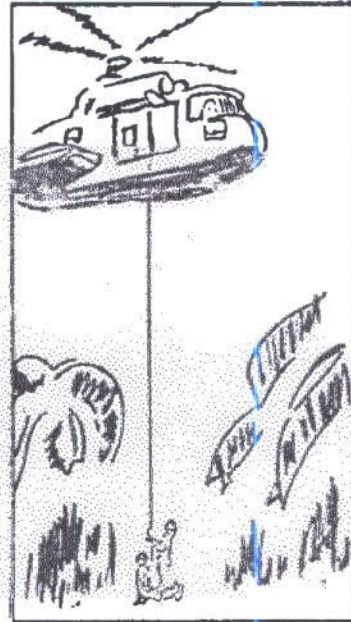


DECLASSIFIED

THE FOREST PENETRATOR

The forest penetrator will be lowered in the closed position. To use:

- Allow penetrator to touch ground in order to discharge static electricity.
- Fold two seats down and sit down placing one seat under each leg.
- Unzip safety strap and secure around back under arms. Fasten strap to bar located above strap. (See arrow)

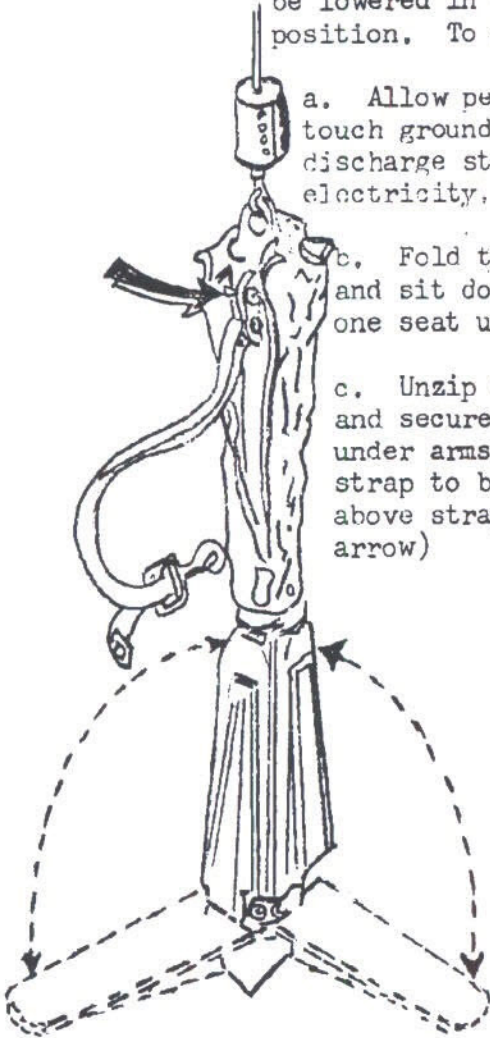

When ready, give "thumbs up" signal to hoist operator.



Survivor is seated correctly on forest penetrator.



The hoist hook swivel (note arrow) will spin rapidly as tension is placed on the cable. Do NOT hold the swivel.

Two man pickup.

- Place least injured survivor (#1) on one folding seat and secure.
- Place #2 man on two folding seats with his legs over #1 man's legs. Secure with strap.
- Hold on to each other and signal operator.
- Hoist operator will bring #2 man into aircraft first, then turn #1 man away from aircraft and bring him in.

Upon reaching a position level with the door, you will be turned to face away from the helicopter and pulled inside by the hoist operator. Do NOT attempt to help him! The operator will disconnect you from the device when you are safely inside the machine.



DECLASSIFIED